

General Guidelines for Annual Inspection of Service Truck Cranes as of April 2019

Legal notice and disclaimer: These general guidelines are intended to be used only as a starting point for a company to develop its own inspection guidelines. Use of these general guidelines is voluntary, and a company should not rely on them without performing its own, independent engineering, safety and legal analysis as to the guidelines' accuracy, completeness and efficacy. NTEA does not make any representations or warranties concerning these guidelines, including without limitation, that these guidelines are complete or error-free, and NTEA undertakes no obligation to update these guidelines in any manner. These guidelines refer only to key, annual inspection items and not all inspection items.

I. Definitions

Anti-two-blocking device: “[A] device which automatically prevents damage from contact between the load block, overhaul ball, or similar component, and the boom tip (or fixed upper block or similar component).” [29 CFR 1926.1416(d)(3)(i)]

Control valves: Used to control the flow/pressure by fully or partially opening or closing in response to control device.

Extension boom/s: Additional booms that telescope out from main boom to increase reach.

Load hook assembly: A hook with a safety latch bridging the throat opening used for hoisting the load.

Hoist: “[A] mechanical device for lifting and lowering loads by winding a line onto or off a drum.” [29 CFR 1926.1401]

Hoist/Winch motor/Pump: Motor to drive hoist drum by electrics or hydraulics.

Main boom: The primary boom affixed to the mast that supports the extension booms.

Mast: The upper frame structure rotating about the base supporting the main boom.

Remote control: A radio or corded pendant device that transmits signals to control the crane from a distance.

Rotation mechanism: Provides rotation of the mast.


Sheave: A grooved wheel or roller for wire rope.

Stabilizer/Outrigger: Extendable, or fixed, members attached to the carrier vehicle (not the crane base) to increase vehicle stability during crane operation.

Wire rope: A rope that travels around sheaves and/or drums.

II. Diagram

Service Truck Crane Components & Terminology

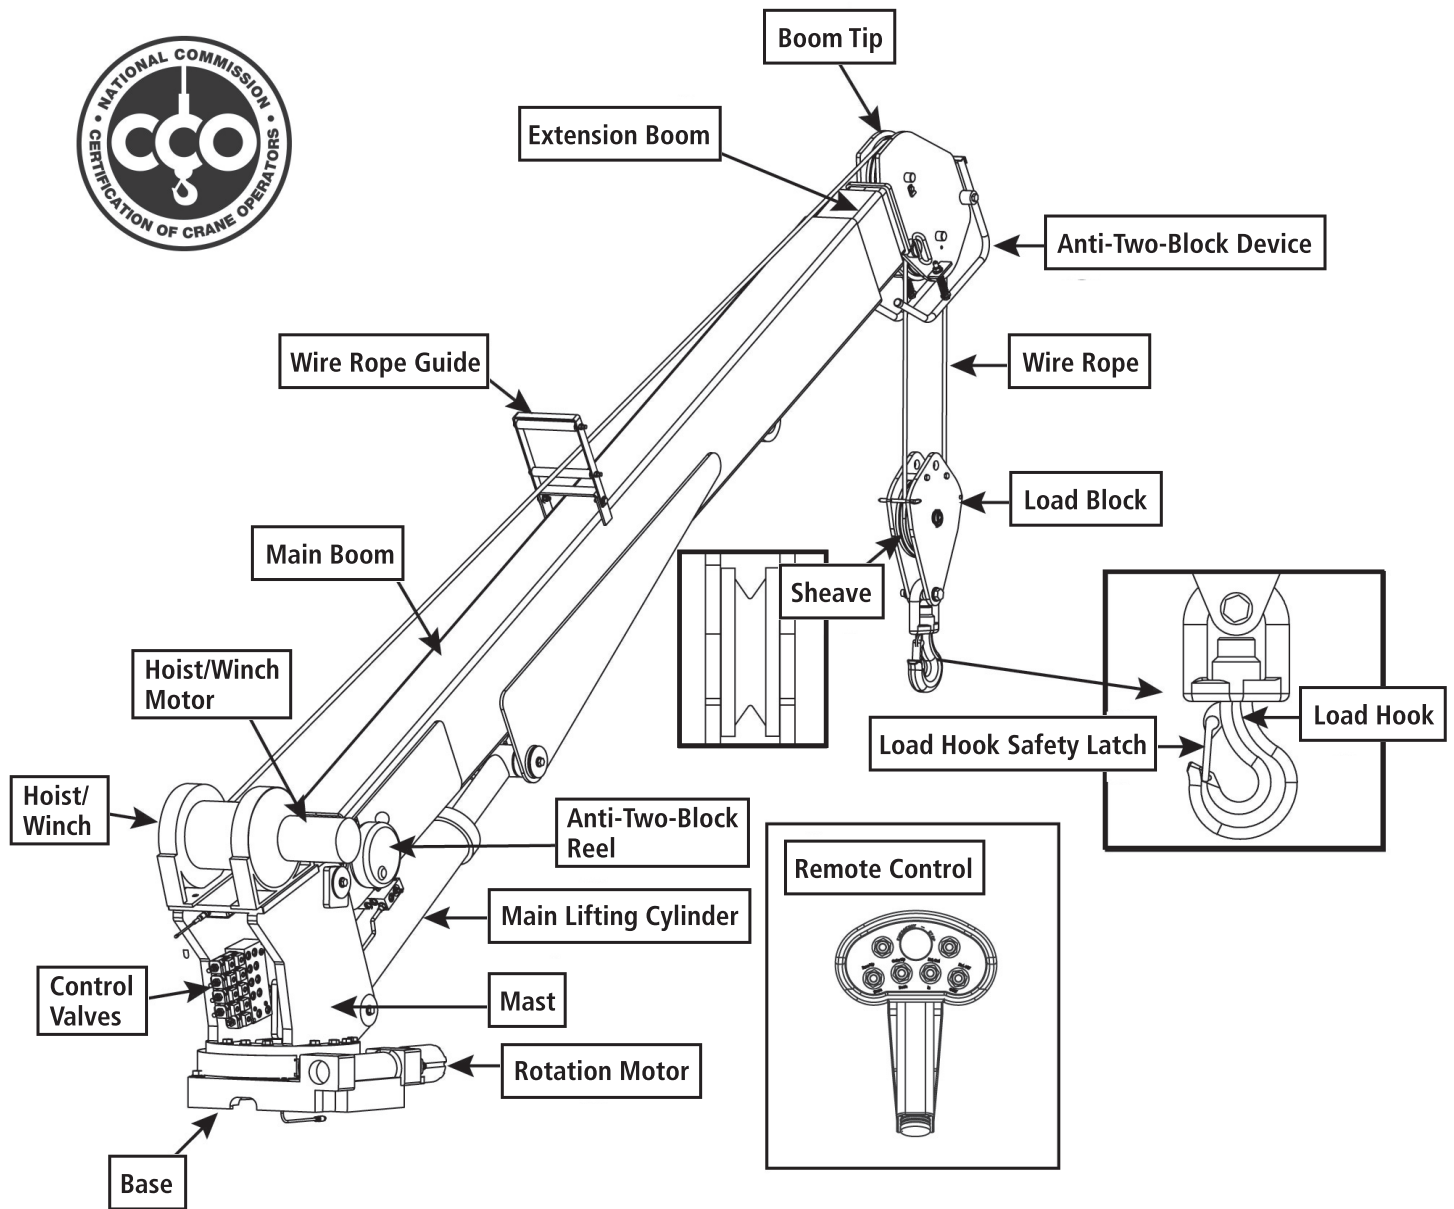

Used with the kind permission of the National Commission for the Certification of Crane Operators (NCCCO). Copyright 2005-2019. All rights reserved.

III. Citations

OSHA

ASME

Chassis		
OSHA 1926.1412(d)(1)(ix)	ASME B30.5-2.1.2(j)	Tire Air Pressure
OSHA 1926.1412(d)(1)(iii)	ASME B30.5-2.1.3(l)	Hoses/Tubes/Fittings
OSHA 1926.1412(d)(1)(iv)	ASME B30.5-2.1.2(i)	Hydraulic Fluid Level
OSHA 1926.1412(f)(2)(xx)/ OSHA 1926.1433(d)(8)	ASME B30.5-1.9.7	Guard/Covers
OSHA 1926.1412(f)(2)(vi)/ OSHA 1926.1433(d)(9)	ASME B30.5-1.9.2	Exhaust Systems
OSHA 1926.601(b)(1)	ASME B30.5-2.1.3(j)	Brakes
OSHA 1926.1412(f)(2)(ix)	ASME B30.5-2.1.3(k)	Tires/ Wheels
OSHA 1926.1412(f)(2)(i)(A)	ASME B30.5-1.10(b)	Main Frame Members

Outriggers/Stabilizers		
OSHA 1926.1412(d)(1)(iii)	ASME B30.5-2.1.2(e)	Hoses/Tubes/Fittings
OSHA 1926.1412(f)(2)(xiii)(E)	ASME B30.5-1.9.3(a)	Lock (Manually Extended)
OSHA 1926.1412(f)(2)(xiii)	ASME B30.5-2.1.3(o)	Cylinders
OSHA 1926.1412(f)(2)(xiv)	ASME B30.5-1.9.3(d)	Pads/ Floats
OSHA 1926.1412(f)(2)(xii)	ASME B30.5-1.9.3(c)	Holding Valves (Vertical O.R. cylinders)
OSHA 1926.1412(f)(2)(i)(C)	ASME B30.5-2.1.3(a)	Welds
OSHA 1926.1412(f)(2)(i)	ASME B30.5-2.1.3(a)	Beams
OSHA 1926.1412(f)(2)(xvii)		Caution/ Warning Signs

OSHA**ASME**

Operator Control Devices		
OSHA 1910.180(d)(3)(i)	ASME B30.5-1.6.1	Control Devices
OSHA 1910.180(d)(3)(vii)	ASME B30.5-1.6.1(d)	Remote Controls
	ASME B30.5-1.6.1(e)	Remote Control Emergency Stop
	ASME B30.5-1.6.1(a)	Controls Identified
OSHA 1910.180(d)(3)(ii)	ASME B30.5-2.1.2(a)&(b)	Adjustment and Excessive Wear
	ASME B30.5-1.6.3(a)	Remote Start Options
	ASME B30.5-1.6.3(b)	Throttle Control

Load Chart		
OSHA 1926.1417(c)(1)/ OSHA 1910.180 (c)(1)(i)	ASME B30.5-1.1.3(a)	Per Configuration
OSHA 1910.180 (c)(2)	ASME B30.5-1.1.3(b)	Durable
OSHA 1910.180 (c)(2)	ASME B30.5-1.1.3(b)	Legible
OSHA 1910.180 (c)(2)	ASME B30.5-1.1.3(b)	Securely Attached

Safety Device/Operational Aid		
OSHA 1926.1416(d)(1)(i)(A)	ASME B30.5-1.9.1(c)	Boom Angle Indicator
OSHA 1926.1416 (e)(4)(i)	ASME B30.5-1.9.10.2	Overload Protection
OSHA 1926.1416 (d)(1)(xi)	ASME B30.5-1.9.12(d)	Crane Level Device
OSHA 1926.1416 (d)(3)(i)	ASME B30.5-1.9.10.1(a)	Anti Two-Blocking/ Damage Prevention Device

OSHA**ASME**

Mast/Base		
OSHA 1926.1412(d)(1)(iii)	ASME B30.5-2.1.2(e)	Hoses/Tubes/Fittings
OSHA 1926.1412(f)(2)(i)(B)	ASME B30.5-2.1.3(b)	Structural Fasteners
OSHA 1926.1412(f)(2)(iii)	ASME B30.5-2.1.3(d)	Turntable/Rotate/Bearing
OSHA 1926.1412(f)(2)(xi), (A), (B),(C)	ASME B30.5-2.1.3(m)	Hydraulic Motor/Pump
OSHA 1926.1412(f)(2)(xi)(D)	ASME B30.5-2.1.3(n)(6)	Hydraulic Pressure
OSHA 1926.1416 (d)(1)(xi)	ASME B30.5-2.1.2(h)	Electrical Wiring
OSHA 1926.1412(f)(2)(i)(C)	ASME B30.5-2.1.3(a)	Welds

Winch		
OSHA 1926.1412(d)(1)(iii)/ OSHA 1910.180(d)(3)(iv)	ASME B30.5-2.1.2(e)	Hoses/Tubes/Fittings
OSHA 1910.180(d)(3)(vii)	ASME B30.5-2.1.3(m)	Hydraulic/ Electric Motor
OSHA 1926.1412(d)(1)(iv)	ASME B30.5-2.3.4(a)	Winch Gear Fluid Level
	ASME B30.5-1.3.2(a)(2)(-c)	Wire Rope Below Drum Flange
OSHA 1910.180(h)(3)(x)	ASME B30.5-1.3.2(a)(2)(-a)	Wire Rope Minimum
OSHA 1910.180(d)(4)(iii)	ASME B30.5-2.1.3(c)	Drums and Sheave Devices
OSHA 1910.180(d)(3)(iii)	ASME B30.5-2.1.6(b)	Safety Devices

OSHA**ASME**

Wire Rope		
OSHA 1910.180(g)	ASME B30.5-2.4.2	Inspection Overview
OSHA 1910.180(d)(3)(vi)		Reeving
OSHA 1926.1413(a)(2)(ii)(a)(2)/ OSHA 1926.1413(a)(2)(iii)(A)	ASME B30.5-2.4.2(a)(3)(-a)	Rotation Resistant
OSHA 1926.1413(a)(2)(i)(A)/ OSHA 1910.180(g)(1)(iii,vi)	ASME B30.5-2.4.2(a)(1)(-a)	Deformities
OSHA 1926.1413(a)(2)(i)(B)/ OSHA 1910.180(g)(1)(I,iv,v)	ASME B30.5-2.4.2(a)(1)(-b);(b)(2)(-c) and (-d)	Corrosion Damage
OSHA 1926.1413(a)(2)(i)(c)	ASME B30.5-2.4.3(b)(5)	Electrical/Heat Damage
OSHA 1926.1413(a)(2)(ii)(A)/ OSHA 1926.1413(a)(2)(iii)(C)/ OSHA 1910.180(g)(1)(ii)	ASME B30.5-2.4.2(a)(1)(-c); b(2)(-c)	Wire Damage
OSHA 1926.1413(a)(2)(ii)(B)/ OSHA 1910.180(g)(1)(i)	ASME B30.5-2.4.2 (b)(2)(-b)	Diameter Reduction

Main Boom		
OSHA 1926.1412(d)(1)(iii)	ASME B30.5-2-1.2(e)	Hoses/Tubes/Fittings
OSHA 1926.1412(f)(2)(xiii)	ASME B30.5-2-1.3(o)	Lift Cylinder
OSHA 1926.1412(f)(2)(xiii)	ASME B30.5-2-1.3(o)	Extended Cylinder
OSHA 1926.1412(f)(2)(xv)	ASME B30.5-2-1.3(d)	Wear Pads
OSHA 1926.1412(f)(2)(ii)	ASME B30.5-2-1.3(c)	Sheave
OSHA 1926.1412(f)(2)(i)(c)	ASME B30.5-2-1.3(a)	Welds
OSHA 1926.1412(d)(1)(vi)	ASME B30.5-1.7.4(b)	Wire Rope Retainer
OSHA 1926.1412(f)(2)(iii)	ASME B30.5-2-1.3(d)	Tower & Lift Cylinder Pins
OSHA 1926.1412(f)(2)(i)(A)	ASME B30.5-2-1.3(a)	Structure
OSHA 1926.1412(f)(2)(xvii)	ASME B30.5-1.9.12(g)	Electrocution Warning Decal

OSHA**ASME**

Load Block & Load Hook		
OSHA 1926.1412(d)(1)(v)	ASME B30.10-1.10.5(i)	Load Hook Safety Latch
OSHA 1926.1412(f)(2)(ii)	ASME B30.5-1.7.4(a)	Sheave
OSHA 1926.1412(d)(1)(v)	ASME B30.10-1.10.5(f)	Hook Twist
OSHA 1926.1412(d)(1)(v)	ASME B30.10-1.10.5(g)	Hook Throat Opening
OSHA 1926.1412(d)(1)(v)	ASME B30.10-1.10.5(e)	Hook Wear
OSHA 1926.1412(d)(1)(v)	ASME B30.5-2.1.2(f)	Hook Swivel
OSHA 1910.180(b)(2)	ASME B30.10-1.8	Capacity Marking
OSHA 1910.180(b)(2)	ASME B30.10.1-8	Weight Marking
OSHA 1926.1412(d)(1)(vi)	ASME B30.5-1.7.4(b)	Wire Rope Retainer
OSHA 1926.1412(f)(2)(iii)	ASME B30.5-2.1.3(d)	Pin For Load Block

Load Test		
OSHA 1910.180(e)(2)	ASME B30.5-2.2.2	Main Boom and Components